
Evaluation and Analysis of Lightweight Concrete (LWC) Manufacturing and Applications

Asst. Lect. Amenah E. Mohammed Redha
Iraqi Ministry of higher education/ Dijlah University College

E-mail : amna.emad@duc.edu.iq

Abstract

This paper presents the evaluation and analysis of LWC) manufacturing and applications. Clear comparisons of different LWC types according to the physical specifications and properties lead to accurate selection of concrete type depending on the conditions surrounding the buildings projects. The widely used of LWC in all over the world is approaching researchers to seriously consider finding new techniques to produce more resistant varieties nearby conditions of construction projects. The LWC types are more sustainable than burnt brick due to its providing high densities and better insulation. This work has been carried out the deep discussion and comparison between the properties of fly ash, AAC and CLC concrete types. The advantage of aerated lightweight concrete compared with traditional concrete is present in advance strength to weight ration, less thermal expansion coefficient and high insulation of sound. The classified of aerated lightweight concrete into foamed and autoclaved concrete has attention in the suggested mixture. By maintain density as constant parameter, their load carrying capacity in compression, water absorption and thermal insulation are to be tabulated and concluded by their performance.

Keywords: AAC; aerated concrete; CLC; fly ash; foamed concrete; LWC

1. INTRODUCTION

Nowadays, the most important factors in construction projects is represented by light weight concrete (LWC) due to many facilities achieved in this type of materials (1). Current researches presented high concrete performance to be close with user demand material properties and applications (2). In addition, the cost effective factors with no quality scarify is another vital role in building structure with dead load reducing as in multi storage buildings and structure elements (3). In natural sand and lightweight studies, the commercial fine aggregate has been investigated in place of natural sand manufacturing (4). The environments and economic benefits of light weight concrete could be achieved in case of waste materials are used instead of fine light weight aggregate (5). To provide light weight concrete, the natural aggregate will reduce the non renewable consumptions in modern buildings (6). Due to light weight concrete properties, one could not made heavy load bearing of infrastructures because of low bearing capacity (7, 8). To act link wall and supporting the structure building, the light weight should be used (8). The main types of LWC could be summarized by three points (9).

The first, autoclaved aerated which is made up of cement, gypsum, water and sand with a bite amount of powder. It is called as aircrete due to entrain the air into the components with 50% air void. Additionally, this type of LWC is a porous material which consisting uniform air to make it lighter. The raw material is mixed with water as required density and expansion agent such as powder adding to the mixture which will increase the volume by five times the original quantity to react with calcium hydroxide and produce of water cement reactions. The powder and calcium hydroxide reactions produce uniform micro air bubbles resulting in higher volume of concrete.

Second, the foam concrete mixed with sand, water, fly ash and cement are called cellular light weight concrete. After the foam agent was dilute with air and water, then the mixture is mixed with cement slurry to maintain the shape around the foam bubbles of about 30% entrain of air by volume to produce low density foam concrete. Afterwards, one could categorize this type of LWC as cellular material due to its consisting of a high quantity of pores. Additional amount of foam concrete depends on the quality and type of foams. Because this mixture is not containing coarse aggregate, the correct terms could be named mortar which has density varies from $(400-600) \text{ kg/m}^3$. Two types of foam agent are used as construction material, one is called protein based foaming agents which is come from animal protein and the other is called synthetic foaming agents. The first type is suitable to produce concrete foam with high density and strength. The second type is used to reduce the surface tension of liquid.

Third, the fly ash concrete has high economic and environmental advantage as coal combustion product which is divided the residue left into boiler, blast furnace. This types contain 20% of cementations material with three flash ash types such as class C and F of high lime, intermediate lime and low lime. These types are lighter in weight due to partial substitution of fine aggregate and coarse aggregate. A greater density and cost effective are the main properties of these types to compression the ratio of strength. The raw components of fly ash concrete are fly ash, water and sand which are mixed in good way according to the required task.

The most popular type of LWC is the aerated concrete which also knows as cellular concrete (10). There are two type of aerated concrete to production technique. The first concrete type called non autoclaved aerated concrete (NAAC) and the second type is called autoclaved aerated concrete (AAC) (11). Figure 1 illustrates the classification of aerated lightweight concrete.

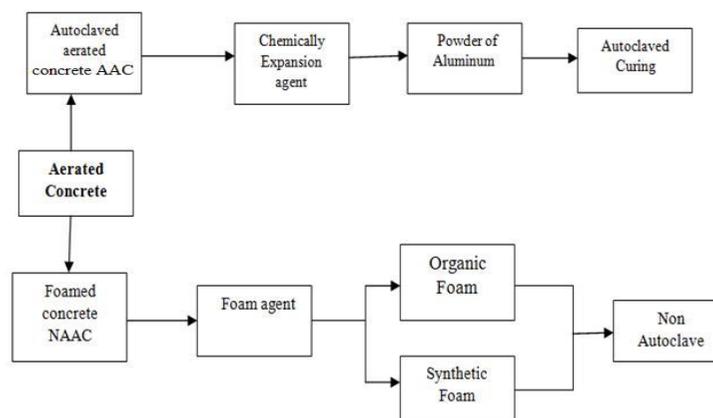


Figure 1. Aerated lightweight concrete class

By injection the performed stable foam or adding the special air entraining into mix of cement or mortar, the foamed concrete type NAAC is produced (12). Whereas, by adding a portion of aluminum powder with sand, lime, slurry of ground, cement and water, the ACC foamed concrete is produced (13). The foam concrete setting looks much better than lightweight aggregate (14). Early 1920s, the foamed concrete is firstly recorded by using date back for construction works was recognize at mid of 1970s (15). For the first time, foamed concrete discovered with mixture of cement, sand, water and lime by Swedes in 1914 and expands by add aluminum powder to produce hydrogen gas in cement slurry (16). Over 60 years ago, the Europe was reported that the foamed concrete has developed by inventing minds had tried beaten egg white, yeast and other unusual technique of adding air to the concrete (17). The foamed concrete provides minimum consumption of aggregate, high flow ability and minimum self weight (18). In addition, these concrete types could support thermal insulation property, controlled low strength with high range of density up to 1600 kg/m^3 which could provide filling grades and partition (19). The foamed concrete is very stable density which provides more than 1000 kg/m^3 with good strength and shelf life of about one year under sealed conditions (20). The synthetic foam gives lower strength foamed concrete and has finer bubble size (21, 22, and 23).

The aluminum powder is typically used to produce autoclaved aerated concrete with chemical response and generate gas in fresh mortar with large number of gas bubbler (24). A worldwide using of foam agent is in ACC manufacturing with widely preventing the best solution (25). The adding of aluminum by 0.5% dry weight of cement to the ingredients mixing is classified into atomizes flake and granules types (26). The weight, thickness and length of particle atomized have approximately same order when the width and length of flack particle may have many hundred times for the thickness (27). In ACC industry, the aluminum powder is made by foil scrap and exists of microscopic flack shape. Grain size of 100 μm with aluminum and fractions less than 50 μm could be form high flammable aero suspensions during pouring (28). The ACC type production required aluminum powder that consist fraction finer than 100 or 50 μm in order to produce requirements of mechanical properties of the aerated concrete (29). Many researchers were proposed new approach to generate LWC with better properties. The optimum quantity of waste of 9 wt % sawdust is proposed on Figure 2 (30). These proportions generate bricks mechanical possessions which are suitable to use as minor raw material in ceramic element. In 2012, the relation of damp, physical and mechanical depend on particle size are also presented in figure 2 (30). The mixture of experimental ideas, technical means, hydration, hardening, raw materials, and other possessions of the thermal insulation mortar block have been considered lengthily and methodically (31, 32, and 33).

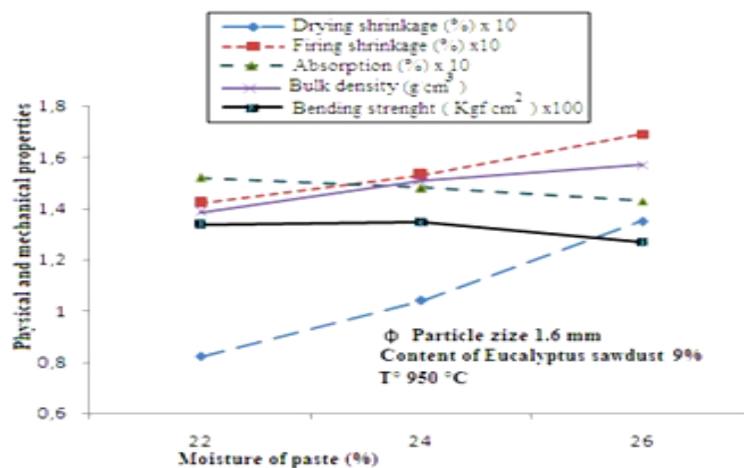


Figure 2. Physical-and mechanical properties proposed (30)

2. METHODS

In the proposed experiment, the subsequent material percentage is used to produce the foam concrete. First of all, the cement is a compulsory material used in building project that sets and hard-bitten to other materials when respond with the water. When cement is used with just fine aggregate, then the mortal is produces, while when cement is mixed with fine aggregate and coarse aggregate, the result is known as concrete. Table 1 shows physical properties of normal Portland cement type grade 53.

Table 1. Physical possessions of cement

Properties Standards	Details IS-269.1989 & IS.383.1970
Color	White
Gravity	3.15
Surface Area	2250 cm ² /kg
Compressive Strength	53 MPa

The fly ash is weakly rating element and spherical shape with range from 0.5-300 μm which is consist of 25% cement to provide workability and reliability to concrete and less heat of hydration in this case. Fly ash could be used to increase the setting of concrete and providing high strength in the next stages. Table 2 illustrates the physical possessions used in the proposed experiment.

Table 2. Fly ash properties

Properties Standards	Details IS.3812.1.2003
Gravity	2.5
Fly ash	Class C
Surface Area	4000 cm ² /kg
Color	White

The sand used in this experiment is natural occurrence grainy material which is collected of finely divided rock and sandstone elements. The sand is defined by its size being better than gravel and coarser, than the silt and the quantity of this sand is used to ensure less amount of cement and lesser water to increase the strength and durability but it produce less shrinkage to the concrete. Due to size range of sand used in this experiment is between (0.06-2) mm, the gravity of sand used is 2.5 with fineness modulus is 2.6 and the coda standard is IS.383.1970.

The gypsum used in the proposed mixture is a type of mineral and hydrated calcium sulfate in the form of chemical material. The gypsum is a very important material in the recompense the rate of solidifies of cement which is used to control the setting time. [Table 3](#) shows the gypsum physical properties.

Table 3. Gypsum properties

Properties Standards	Details IS.3812.1.2003
Gravity	2.3
Chemical Formula	Ca(OH) ₂ .2H ₂ O
Surface Area	Up to 3800 cm ² /g
Color	White Gray
Size	Less than 1mm

To make ACC type, the lime is used in order to reduce the water amount in concrete block as well as prevents ACC type from fast drying and dry shrinkage. The main type of lime is represent by hydrated lime, fat lime and quick lime in which hydrated lime is widely used to produce the constructions. [Table 4](#) shows the hydrated lime physical specifications.

Table 4. Hydrated lime specifications

Properties Standards	Details IS.3115.1992
Gravity	2.81
Type	Hydrate Lime
Surface Area	4300 cm ² /g
Color	White
Chemical Format	CaO

The aluminum powder is finely grinded powder used in this experiment which reacts with calcium hydroxide of cement water reaction. After reaction between aluminum powder and calcium hydroxide, this mixture produce uniform micro bubbles which resultant in concrete volume rising creation and it very light weight concrete. In [Table 5](#), the physical specifications of aluminum powder could be summarized.

Table 5. Aluminum powder specifications

Properties Standards	Details IS.3115.1992
Gravity	0.22
Melting point	-660°C
Surface area	7000 cm ² /g
Color	Gray
Particle size	45

The foaming agent is a material used to facilitate the formation of foam like a surfactants property. After the foaming agent has added into the water with 1:30 to 1:40 percentage, the foam will generate with low weight and brown-white color in this case. The foam concrete type CLC is produce after mixing slurry with foam. In Table 6, the physical specifications of foaming agent which is used to generate CLC concrete is summarized.

Table 6. Foaming agent Physical specifications

Properties Standards	Details IS.3115.1992
Gravity	1.15
State	Liquid
Color	Brown
Temperature	at 20°C

3. RESULT AND DISCUSSION

The AAC type of concrete is durable and workable specifications of this block with the 15 cm³ size. In case of fire resistance and sound insulation test, the thickness of AAC block is consider to be 100 mm. Table 7 illustrated the AAC properties in the proposed work and the strength results of different concrete types are shown in Figure 3.

Table 7. AAC specifications

Density Kg/m ³	Strength N/mm ²	Water Absorption (%)	Thermal Conductivity (W/mK)	Resistance (Hr)	Sound Insulation
1000	7	30	0.4	5	45
1100	8	25	0.49	5	46
1200	10	20	0.54	5.5	48
1300	11	15	0.62	6	50
1400	12	10	0.7	6	55

The CLC concrete type has characteristic such durable and workable specifications block with 15 cm³ size case. In case of fire resistance and sound insulation test, the thickness block of 100 mm has been considered. Table 8 illustrated the CLC properties in the proposed work. For the water absorption results, thermal conductivity and sound insulation of concrete are illustrated in Figure 4, Figure 5 and Figure 6 respectively.

Table 8. CLC specifications

Density (Kg/m ³)	Strength (N/mm ²)	Water Absorption (%)	Thermal Conductivity W/mK	Resistance (Hr)	Sound Insulation in dB
1000	3.5	13	0.46	5	40
1100	7	11	0.51	5	41
1200	9	9	0.59	5.5	42
1300	11	8	0.67	6	43
1400	12	7	0.79	6	44

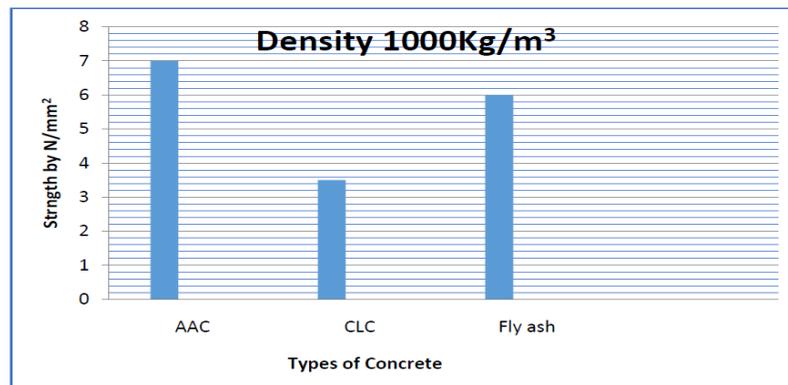


Figure 3. Strength results of different concrete types

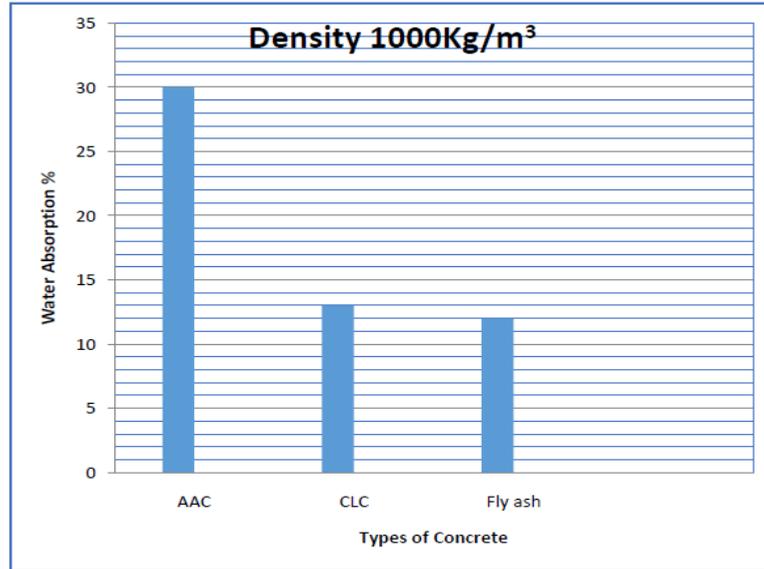


Figure 4. Water Absorption results of different types of concrete

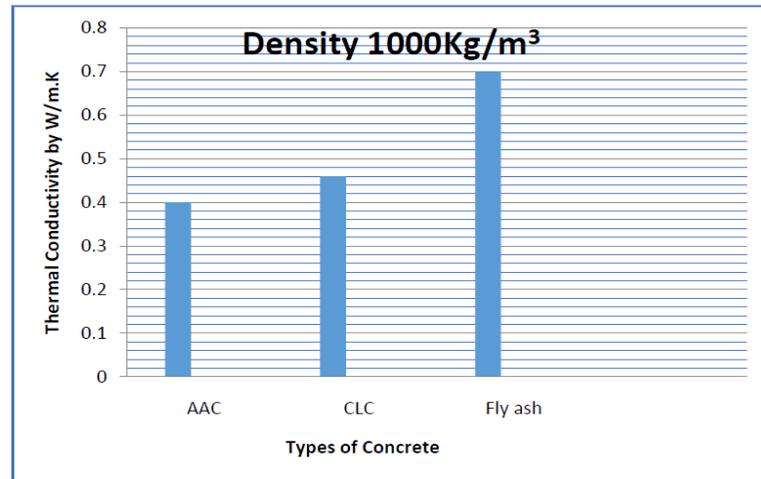


Figure 5. Thermal Conductivity results of different types of concrete

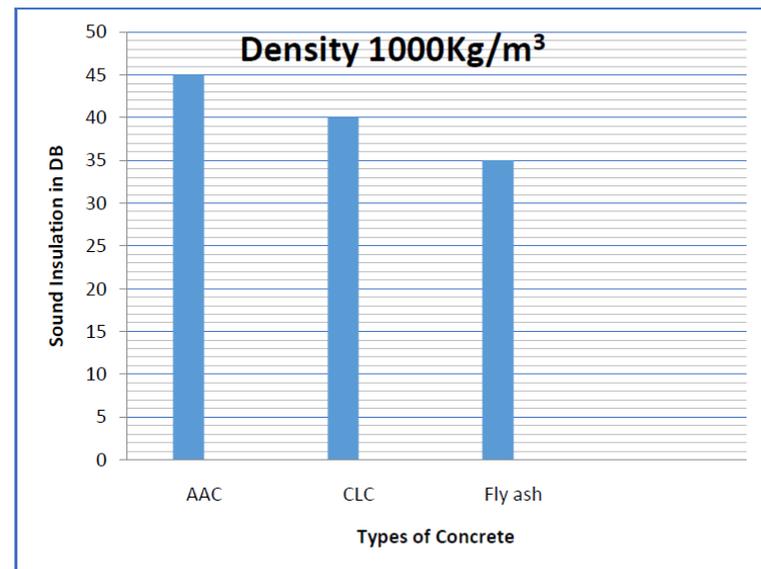


Figure 6. Sound Insulation results of different types of concrete

The fly ash concrete type has characteristic such durable and workable specifications block with 15 cm³ size case. In case of fire resistance and sound insulation test, the thickness block of 100 mm has been considered. Table 9 illustrated the AAC properties in the proposed work.

Table 9. Fly ash specifications

Density Kg/m ³	Strength N/mm ²	Water Absorption (%)	Thermal Conductivity W/m.K	Sound Insulation in dB
1000	6	12	0.7	35
1100	9	12	0.75	36
1200	12	14	0.79	37
1300	14	11	0.79	38
1400	15	10	0.79	38

4. CONCLUSION

This paper presents the evaluation and review of lightweight concrete (LWC) manufacturing and applications. Different type of LWC is investigated and explained as well such as AAC, CLC and fly ash concrete. The durable and bearable specifications and properties of these concrete types are illustrated in Table 1, 2, and 3 with their own reassurance field. The strength of compressive, the absorption of water, sound insulation and conductivity of thermal were compared by means of corresponding density. From compressive strength of AAC block looks better than CLC and fly ash base concrete while water absorption of fly ash based concrete is quit better with respect to other types of LWC. The thermal conductivity of AAC and CLC are providing same performance with better conductivity than fly ash. In the soundresistance side, the AAC provides better performance than CLC and fly ash. The test tables and analysis show that the AAC type of concrete are most preferable compared with other concrete types due to the strength of compressive as well as less dead load of AAC types. These results indicate that the AAC of concrete looks more promising in current and future building projects. More investigation and tuning test could propose to produce better concrete mixture with high resistance and less weight.

REFERENCES

1. Berge B. The ecology of building materials. 2nd ed. Architectural Press – Elsevier; 2009.
2. Pelisser F et al. Lightweight concrete production with low Portland cement consumption. J Cleaner Prod 2012;23(1):68–74, 2012
3. Akcaozoglu S, Atis CD. Effect of granulated blast furnace slag and fly ash addition on the strength properties of lightweight mortars containing waste PET aggregates. Constr Build Mater 2011;25(10):4052–8, 2011
4. Kockal NU, Ozturan T. Strength and elastic properties of structural lightweight concretes. Mater Des 2011;32(4):2396–403, 2011
5. Ducman V, Mirtic B. The applicability of different waste materials for the production of lightweight aggregates. Waste Manage (Oxford) 2009;29(8):2361–8, 2009
6. Xu Y et al. Mechanical properties of expanded polystyrene lightweight aggregate concrete and brick. Constr Build Mater 2012;27(1):32–8, 2012
7. Trtik P et al. Release of internal curing water from lightweight aggregates in cement paste investigated by neutron and X-ray tomography. Nucl Instrum Meth A 2011;651(1):244–9, 2011
8. Madandoust R, Ranjbar MM, Mousavi SY. An investigation on the fresh properties of self-compacted lightweight concrete containing expanded polystyrene. Constr Build Mater 2011;25(9):3721–31, 2011
9. Shannag MJ. Characteristics of lightweight concrete containing mineral admixtures. Constr Build Mater 2011;25(2):658–62, 2011
10. Zhang H. Building materials in civil engineering. Cambridge, UK: Woodhead Publishing; 2011
11. El-Gamal SMA, Hashem FS, Amin MS. Thermal resistance of hardened cement pastes containing vermiculite and expanded vermiculite. J Therm Anal Calorim 2012;109(1):217–26, 2012

12. Demirboga R, Kan A. Thermal conductivity and shrinkage properties of modified waste polystyrene aggregate concretes. *Constr Build Mater* 2012;35:730–4, 2012
13. Koksak F et al. Effect of high temperature on mechanical and physical properties of lightweight cement based refractory including expanded vermiculite. *Mater Res Innov* 2012;16(1):7–13, 2012
14. Hossain KMA, Ahmed S, Lachemi M. Lightweight concrete incorporating pumice based blended cement and aggregate: mechanical and durability characteristics. *Constr Build Mater* 2011;25(3):1186–95, 2011
15. Castro J et al. Absorption and desorption properties of fine lightweight aggregate for application to internally cured concrete mixtures. *Cem Concr Compos* 2011;33(10):1001–8, 2011
16. Sengul O et al. Effect of expanded perlite on the mechanical properties and thermal conductivity of lightweight concrete. *Energy Build* 2011;43(2–3):671–6, 2011
17. Ismail A, Elmaghraby M, Mekky H. Engineering properties, microstructure and strength development of lightweight concrete containing pumice aggregates. *Int J Dordrecht* 2013;31(5):1465–76, 2013
18. Kim HK, Jeon JH, Lee HK. Workability, and mechanical, acoustic and thermal properties of lightweight aggregate concrete with a high volume of entrained air. *Constr Build Mater* 2012;29:193–200, 2012
19. Kismi M, Poullain P, Mounanga P. Transient thermal response of lightweight cementitious composites made with polyurethane foam waste. *Int J Thermophys* 2012;33(7):1239–58, 2012
20. Shafiq P et al. Lightweight concrete made from crushed oil palm shell: Tensile strength and effect of initial curing on compressive strength. *Constr Build Mater* 2012;27(1):252–8, 2012
21. Sariisik A, Sariisik G. New production process for insulation blocks composed of EPS and lightweight concrete containing pumice aggregate. *Mater Struct* 2012;45(9):1345–57, 2012
22. ACI Committee 213, "Guide for structural lightweight-aggregate concrete (ACI 213–R14)", American Concrete Institute, Farmington Hills, MI, 2014
23. Bogas, J. A. and Gomes, A., "Non-steady-state accelerated chloride penetration resistance of structural lightweight aggregate concrete", *Cement and Concrete Composites*, Vol. 60, 111-122, 2015
24. Sanaa A. Hafid and Amenah E. Mohammed Ridha, "A Comparative Study of Thermal Insulations and Physical Properties of Lightweight Concrete Using Some Raw Materials", *Eng. And Tech. journal*, vol. 34, part B, No.4, 2016
25. Adilson Schackow, et al., "Mechanical and thermal properties of lightweight concretes with vermiculite and EPS using air-entraining agent", *Construction and Building Materials*, 0950-0618/ Elsevier, 2014
26. Ashish Kurweti, et al., "Comparative analysis on aac, clc and flyash concrete Blocks", *IJEDR | Volume 5, Issue 2*, 2017
27. Sang-Yeop Chung, et al., "Effect of Different Gradings of Lightweight Aggregates on the Properties of Concrete", *Appl. Sci.* 2017, 7, 585; doi:10.3390, 2017
28. Jin Young Yoon, et al., "Lightweight Concrete Produced Using a Two-Stage Casting Process", *Materials* 2015, 8, 1384-1397; doi:10.3390/ma8041384, 2015
29. Min Ook Kim, et al., "Application of structural lightweight aggregate concrete in floating marine concrete structures – A review", *The Twenty-Ninth KKHTCNN Symposium on Civil Engineering* December 3-5, 2016, Hong Kong, China, 2016
30. Jordan Ouellet, et al., " PREDICTING THE COMPRESSIVE STRENGTH OF ULTRA-LIGHTWEIGHT CONCRETE BY AN ARTIFICIAL NEURAL NETWORK", *RESILIENT INFRASTRUCTURE* June 1–4, 2016
31. Bachir Chemani, and Halima Chemani, "Effect of Adding Sawdust on Mechanical-Physical Properties of Ceramic Bricks to Obtain Lightweight Building Material", *International Journal of Mechanical, Aerospace, Industrial, Mechatronic and Manufacturing Engineering* Vol:6, No:11, 2012
32. Liu Haibo, "Experimental Study on Preparation of Fly Ash Polystyrene New Insulation Building Material", *CHEMICAL ENGINEERING TRANSACTIONS* VOL. 59, 2017
33. Amenah E. mohammed redha *et al.* Laser Effect on Optical and Structural Properties of CdTe: Al Thin Films Prepared by Pulsed Laser Deposition Technique. *Journal of Engineering and Applied Sciences*. 2018